


Accumulating Chain Conveyor AL47


Bleichert Standard

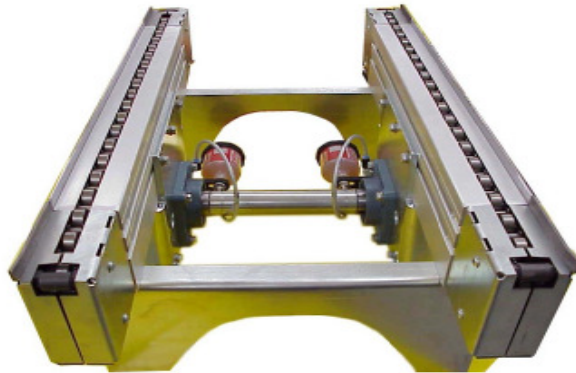

Description

- Accumulating chain conveyor used for transport and buffering of pallets and parts.
- Modular construction to fit a variety of applications.
- Station lengths up to 50 feet per drive.
- Engineered to handle part/tooling weights of up to 2500kg per drive station or more depending on the application.
- Variable conveyor widths up to 1000mm.
- Unlimited conveyor lengths depending on the application.
- Conveyors can be stacked using an elevator for “over/under” applications.
- Speeds up to 60 fpm depending on the application.
- Conveyor can be loaded/unloaded manually or via robot.
- Each conveyor section consists of two extruded aluminium side profiles with integrated steel side guides, chain supports, drive chain, and drive motor.
- Available accessory devices such as part present switches, pallet stops, lift and/or locate units, elevators, transfers, and rotate units.

AL47 Transmission Assembly

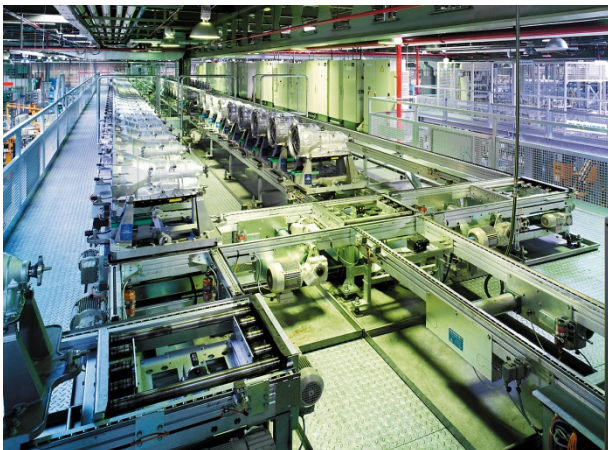

AL47 Over/Under with Elevator

