




Accumulating Pallet Conveyor montaflex „SMART“ compact and maintenance free





Accumulating Pallet Conveyor montaflex „SMART“

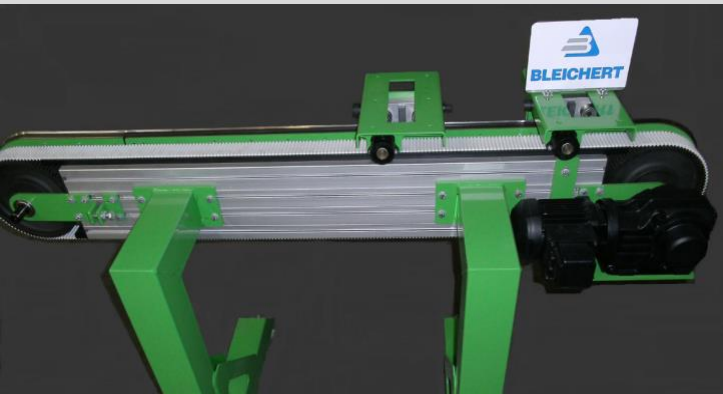

The core of the BLEICHERT montaflex "SMART" are the 300mm long pallets. Each of it is equipped with 4 prism rollers and one hysteresis element. The pallets are driven over a running belt. The load transfer and the guidance are done by the prism rollers. The montaflex "SMART" is built extremely compact and suitable for limited space requirements and small-sized workpieces.

Technical Data	
Standard conveying speed	4m/min to 10m/min
Distance between the conveyor centres	1 to 10m, not coupleable
Load/pallet Maximum load per pallet	max. 20kg per pallet including workpiece carrier max. Weight of the fixtures 10kg
Stop accuracy of the pallet	± 0.3mm (with centring ± 0.1mm)
Maximum slope of the conveyor	up to ± 5° on request
Inclination of the conveyor	continuously up to 90°
Width single pallet	300mm
Length of the pallet	300mm
Pallet center distance	> 200mm
Dynamic pressure limiter	up to 20 pallets

BLEICHERT Automation GmbH & Co.KG
Hans-Ulrich-Breyman-Str. 35
74706 Osterburken, Germany
Tel.: +49 6291 93-0
info@bleichert.de
www.bleichert.de

BLEICHERT Inc.
42450 R Mancini Drive
Sterling Heights, MI 48314
USA
Tel.: +1 586 7268717
www.bleichert.com

BLEICHERT ERS Automation Systems (Nanjing) Co., Ltd.
Yishiyuan Building 1720
Zhongshan North Road 95
210009 Nanjing, P.R. China
Tel.: +86 25 85580951
www.bleichert.cn

